

Follow Us : [G](#) [f](#) [@](#) [in](#)



**KRISHNA**  
**Plastic**

WE BELIEVE IN QUALITY



# About Us

A Leading Manufacturer & Exporter Of Excellent Quality Pet Strap In India. Our Company Is Certified With ISO 9001:2015. We Are A Well-known Business Entity In The Arena Of Manufacturing Optimum Quality Pet Strap. We Have Been Serving Our Clients World Wide Since 2008. Now, We Have Ventured In Pet Strap Manufacturing And Made Our Position Stronger With Our Committed Efforts. We Have Been Consistently Catering The Packaging Requirements Of Our Valued Clients With The Best Quality, High Strength And Durability Of Our Pet Strap . We Have Imported Fully Automatic Extrusion Processing Line And High Skilled Trained Technical Man-power To Produce Superior And Consistent Quality Of Pet Strap With Production Capacity 9000 Kg (09 Mt) Per Day. We Carry Out Comprehensive Laboratory And Field Testing Procedures In All Stages From Raw Material Handling To Strap Production And Delivery To The Client. Beside Strap, We Provide Our Clients The Necessary Strapping Tools And Machines, In Addition To All The Strapping Accessories. Our Pet Strap Quality, Prompt And Timely Delivery And After Sales Supports Has Attracted Customers From Every Corner Of The World.



The Pet Strap Is Well-suited To The Strapping Of Stacked And Packaged Products, Such As Sawn Timber, Cardboard, Chip-board, Plywood, Paper, Tile And Glass. All Of Ours Pet Strap Can Be Used With Manual And Automatic Strapping Machines. Our Strap Has Stable Geometric And Mechanical Characteri-stics Throughout The Length Of The Strap.





# COMPLETE STRAPPING SOLUTIONS


- Retained high tension – ensures that pack is always secure with no loose straps.
- Enhanced product protection and security
- Provides the highest degree of split resistance
- High strength, heavy duty PET STRAP for the toughest, most demanding applications
- Fewer coil changes - each coil holds up to four times more strap than steel, reducing coil changes and increasing productivity

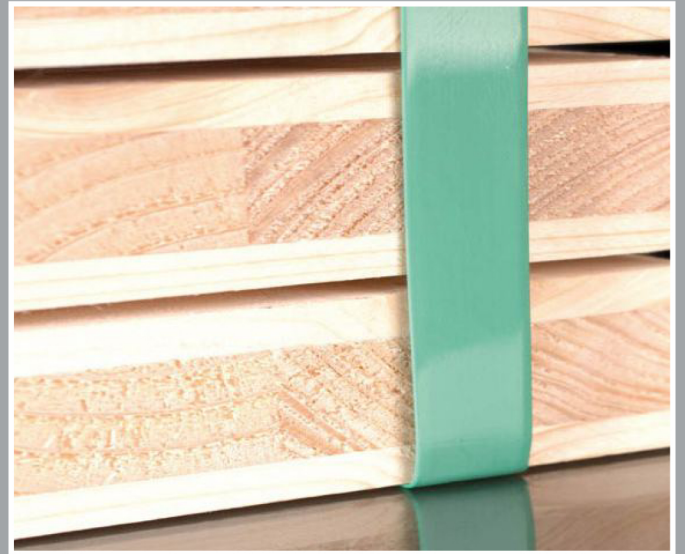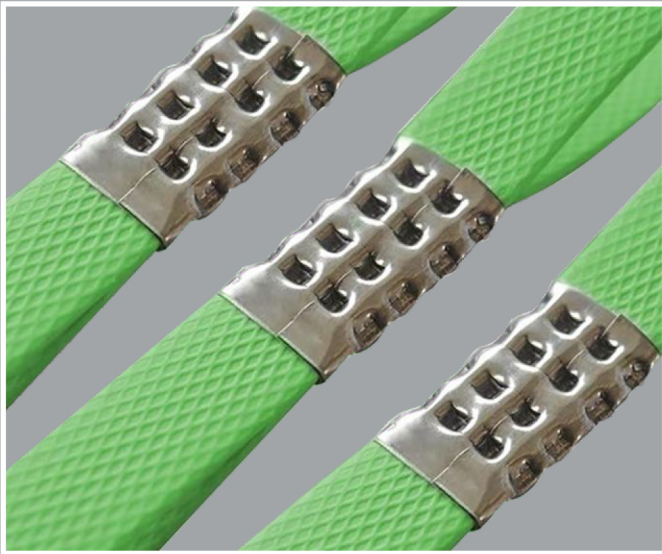

# High Strength And No Relaxing

Extremely strong, tests have shown that PET STRAP has a break strength of up to 18,850 New Tons and an impact resistance five times greater than comparable steel strapping – plus greater resistance to shock forces. And unlike steel, polyester PET STRAP maintains its grip around a cooling, shrinking or settling pack – retaining total product security.

P R O T E C T E D  
**CONDITION**  
PRODUCT

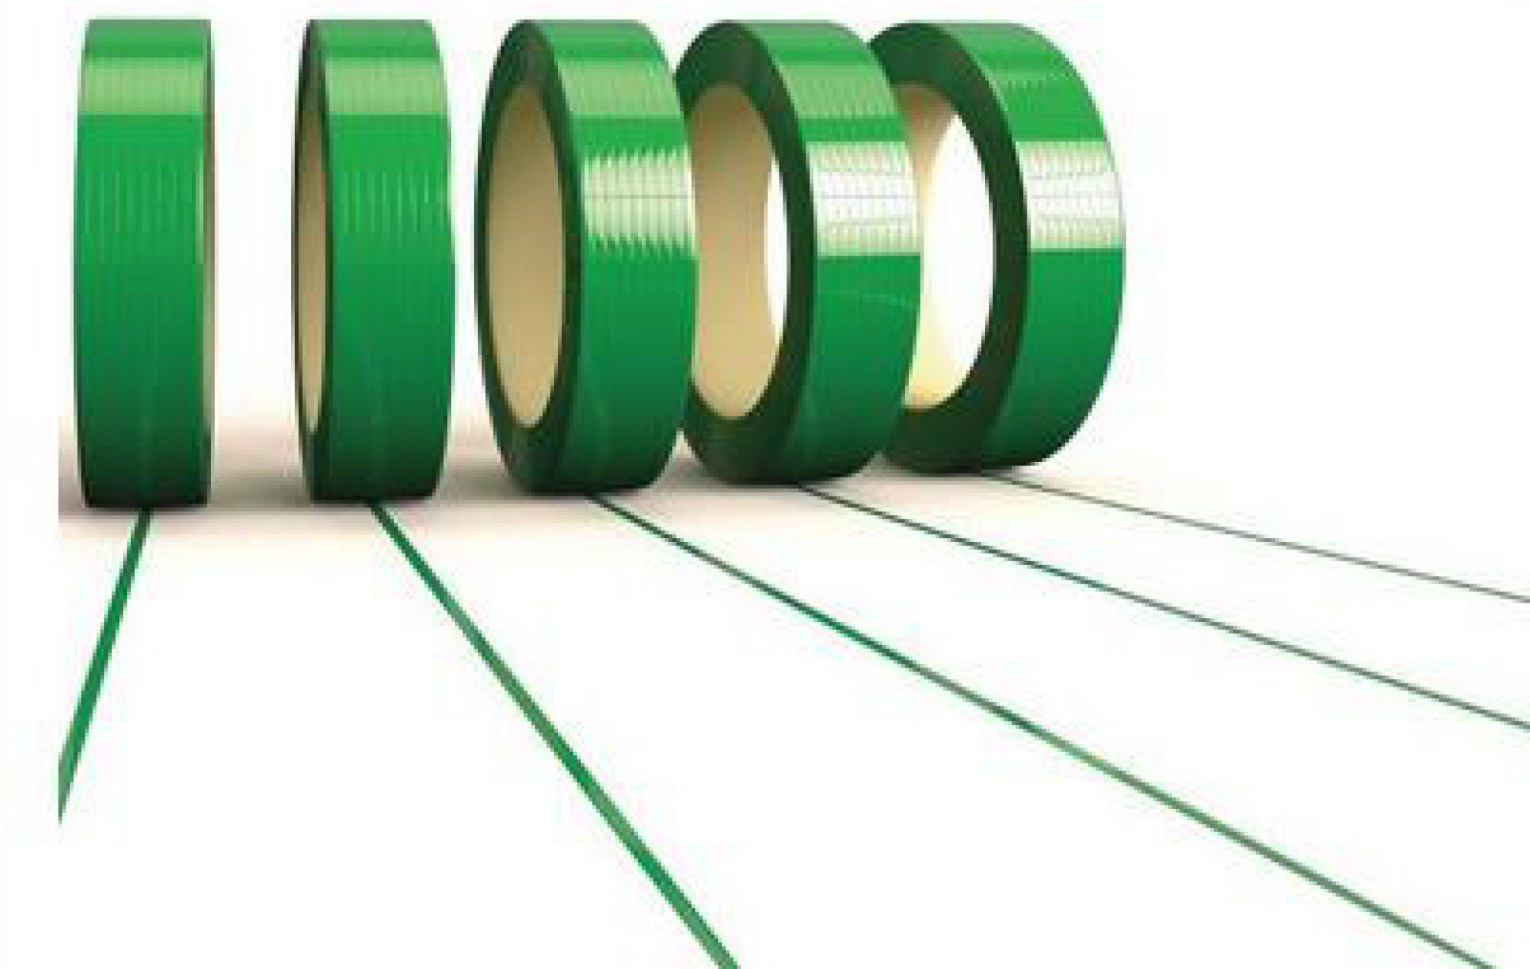





# OUR PACKAGING PERFECTION

## ENVIRONMENTAL FRIENDLY RECYCLABLE STRAP

Being an inert material, The strap could be recycled  
With buried capacity.

## GREEN CREDENTIALS

---

PETSTRAP is up to 80% lighter than steel reducing freight costs and storage space. It's manufactured using up to 100% polyester post consumer waste from our own recycling plant where we clean, wash, Chop and pelletise material to the highest standards. PETSTRAP is also very easy to store in chopped form after use ready for further recycling.

# APPLICATION

---

## Building Material & Wood

Roofing Tiles | Plaster Board |timber |chipboards |plywood

## Palletization

Cartons| Film Rolls|baggage Indutry |botteles |clay Builiding Bricks

## Baling

Man Made Fiber | Cotton | Jute | Coir |rubber

## Industries

Bottling Industry | Steel |glass & Ceramic |automobile |stone |paper Shipping | Refractories | Solid Waste Handling

## Metal Packaging

Steel Coils | Aluminium Ingots | All Kind Of Metal Sheet | Roods Pipes | Aluminium Coils







# SPECIFICATION

| PET STRAP | WIDTH | THICKNESS | BREAK COAD | CORE TYPE | PER METER | METER OF 20 KGS |
|-----------|-------|-----------|------------|-----------|-----------|-----------------|
|-----------|-------|-----------|------------|-----------|-----------|-----------------|

|           |      |         |         |          |          |          |
|-----------|------|---------|---------|----------|----------|----------|
| KP-9      | 9MM  | .50     | 180 KG  | 16" X 8" | 6.12 GM  | 3260 MTR |
| KP-11     | 11MM | .60     | 264 KG  |          | 8.90 GM  | 2240 MTR |
| KP-12.6   | 12MM | .60     | 288 KG  |          | 9.70 GM  | 2061 MTR |
| KP-12.7   | 12MM | .70     | 330 KG  |          | 10.80 GM | 1850 MTR |
| KP-12.8   | 12MM | .80     | 384 KG  |          | 12.50 GM | 1600 MTR |
| KP-15.6   | 15MM | .60     | 360 KG  |          | 12.50 GM | 1600 MTR |
| KP-15.7   | 15MM | .70     | 420 KG  |          | 14.20 GM | 1408 MTR |
| KP-15.8   | 15MM | .80     | 480 KG  |          | 16.30 GM | 1226 MTR |
| KP-15.9   | 15MM | .90     | 540 KG  |          | 18.30 GM | 1092 MTR |
| KP-15.1   | 15MM | 1 MM    | 600 KG  |          | 19.50 GM | 1025 MTR |
| KP-16.8   | 16MM | .80     | 572 KG  |          | 17.20 GM | 1162 MTR |
| KP-16.9   | 16MM | .90     | 575 KG  |          | 19.50 GM | 1025 MTR |
| KP-16.1   | 16MM | 1 MM    | 640 KG  |          | 21.50 GM | 0930 MTR |
| KP-19.8   | 19MM | .80     | 610 KG  |          | 20 GM    | 1000 MTR |
| KP-19.1   | 19MM | 1 MM    | 760 KG  |          | 23.50 GM | 0850 MTR |
| KP-19.127 | 19MM | 1.27 MM | 965 KG  |          | 31 GM    | 0645 MTR |
| KP-25.1   | 25MM | 1 MM    | 1000 KG |          | 34 GM    | 0588 MTR |
| KP-25.127 | 25MM | 1.27MM  | 1270 KG |          | 42 GM    | 0476 MTR |
| KP-32.1   | 32MM | 1 MM    | 1280 KG |          | 43.5 GM  | 0460 MTR |
| KP-32.127 | 32MM | 1.27 MM | 1625 KG |          | 54 GM    | 0370 MTR |

Elogation-allmost  
18% To 20%


---

## PP STRAPS FOR FULLY AUTOMATIC MACHINE

---

15, 16, 18 & 19 MM with customized thickness, color & impressiv flexo printing to meet diversified PP Straps for fully automatic strapping machines are available in various widths like 6, 8, 9, 10, 11, 12, requirement of clients.

There are other several advantages of fully automatic straps like qualitative range of products, more than 50 strapping cycles per minute, optimized strap stiffness, dust free, no splitting and competitive price range.

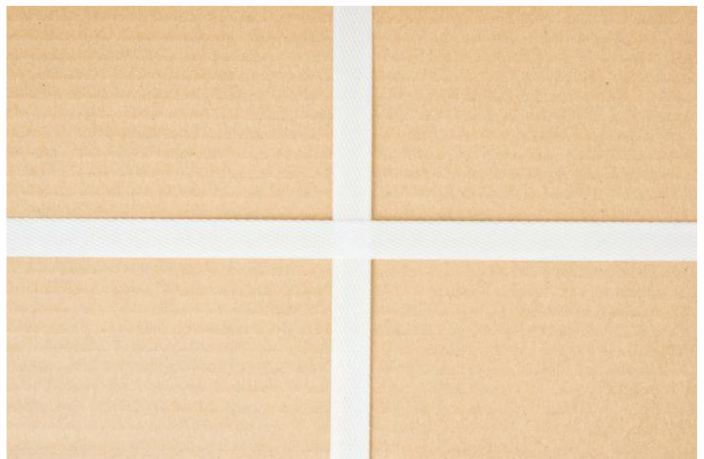



| PRODUCT CODE | WIDTH<br>(in mm)<br>(±0.05) | THICKNESS<br>(in mm)<br>(±0.03) | LENGTH<br>(M./ Per Roll)<br>(±5%) | WEIGHT<br>(Per Roll)<br>(±0.1 Kg.) | Average Break Load<br>(in kg) | REMARKS    |
|--------------|-----------------------------|---------------------------------|-----------------------------------|------------------------------------|-------------------------------|------------|
| KP 806       | 8.00                        | 0.60                            | 2000                              | 5.80                               | 65                            | Customized |
| KP 807       | 8.00                        | 0.70                            | 2000                              | 6.30                               | 80                            | Customized |
| KP 955       | 9.00                        | 0.55                            | 4000                              | 12.00                              | 75                            | Customized |
| KP 906       | 9.00                        | 0.60                            | 2000                              | 6.30                               | 80                            | Standard   |
| KP 907       | 9.00                        | 0.70                            | 2000                              | 7.00                               | 85                            | Standard   |
| KP 1006      | 10.00                       | 0.60                            | 2000                              | 6.75                               | 85                            | Customized |
| KP 1106      | 11.00                       | 0.60                            | 2000                              | 7.00                               | 90                            | Standard   |
| KP 1107      | 11.00                       | 0.70                            | 2000                              | 8.00                               | 110                           | Standard   |
| KP 1255      | 12.00                       | 0.55                            | 2500                              | 10.00                              | 120                           | Customized |
| KP 1206      | 12.00                       | 0.60                            | 2000                              | 8.00                               | 110                           | Standard   |
| KP 1207      | 12.00                       | 0.70                            | 2000                              | 9.00                               | 120                           | Standard   |
| KP 1208      | 12.00                       | 0.80                            | 2000                              | 10.00                              | 120                           | Customized |
| KP 1506      | 15.00                       | 0.60                            | 1000                              | 6.00                               | 130                           | Standard   |
| KP 1507      | 15.00                       | 0.70                            | 1000                              | 7.00                               | 150                           | Standard   |
| KP 1508      | 15.00                       | 0.80                            | 1000                              | 8.00                               | 160                           | Customized |
| KP 1509      | 15.00                       | 0.90                            | 1000                              | 9.00                               | 170                           | Customized |

- Elongation : Up to 12% - 15%
- Standard Colors : White, Other colors on request subject to minimum required quantity.
- Core Size Available : 203mm ID x 187mm

All above speci fication are applicable for virgin quality only. We provide economical qualities but tolerance will increase & vary from specification to specification. Other specification apart from the standard specification can be provided & customized as per requirements on special customer's request & subjected to bulk quantity.

**Note: Embossed design is subject to change without prior notice.**

## PP STRAPS FOR SEMI AUTOMATIC MACHINE

---

PP Straps for semi automatic strapping machines are available in various width like 5, 6, 8, 9, 10, 11, 12, 15, 16, 18 & 19 MM with customised thickness, colour & impressive flexo printing to meet diversified requirement of clients.





| PRODUCT CODE | WIDTH<br>(in mm)<br>(±0.05) | THICKNESS<br>(in mm)<br>(±0.03) | LENGTH<br>(M./ Per Roll)<br>(±5%) | WEIGHT<br>(Per Roll)<br>(±0.1 Kg.) | Average<br>Break Load<br>(in kg) |
|--------------|-----------------------------|---------------------------------|-----------------------------------|------------------------------------|----------------------------------|
| KP 605       | 8.00                        | 0.50                            | 3000                              | 5.250                              | 52                               |
| KP 805       | 9.00                        | 0.50                            | 3000                              | 7.000                              | 65                               |
| KP 905       | 9.00                        | 0.50                            | 3000                              | 7.500                              | 70                               |
| KP 1006      | 11.00                       | 0.60                            | 2000                              | 7.000                              | 80                               |
| KP 1105      | 11.00                       | 0.50                            | 2000                              | 8.000                              | 75                               |
| KP 1107      | 12.00                       | 0.70                            | 2000                              | 8.000                              | 110                              |
| KP 1206      | 12.00                       | 0.60                            | 2000                              | 8.000                              | 110                              |
| KP 1207      | 15.00                       | 0.70                            | 2000                              | 9.000                              | 85                               |
| KP 1506      | 15.00                       | 0.60                            | 1000                              | 6.000                              | 125                              |
| KP 1508      | 15.00                       | 0.80                            | 1000                              | 8.000                              | 160                              |
| KP 1806      | 18.00                       | 0.60                            | 1000                              | 8.000                              | 165                              |
| KP 1908      | 19.00                       | 0.80                            | 1100                              | 10.000                             | 185                              |
| KP 1910      | 19.00                       | 1.00                            | 1000                              | 10.000                             | 190                              |

## PP STRAPS FOR SEMI AUTOMATIC MACHINE

- Elongation : Up to 15% - 18%
- Standard Colors : White, Other colors on request subject to minimum required quantity.
- Core Size Available : 203mm ID x 165mm

All above specification are applicable for virgin quality only. We provide economical qualities but tolerance will increase & vary from specification to specification. Other specification apart from the standard specification can be provided & customized as per requirements on special customer's request & subjected to bulk quantity.

Note: Embossed design is subject to change without prior notice.

# Contact Us



Manufacturer & Exporter - Pet & PP Strap



MR. JAGDISH

+91 81538 53308 | +91 97251 53308



krishnastrapsales@gmail.com